
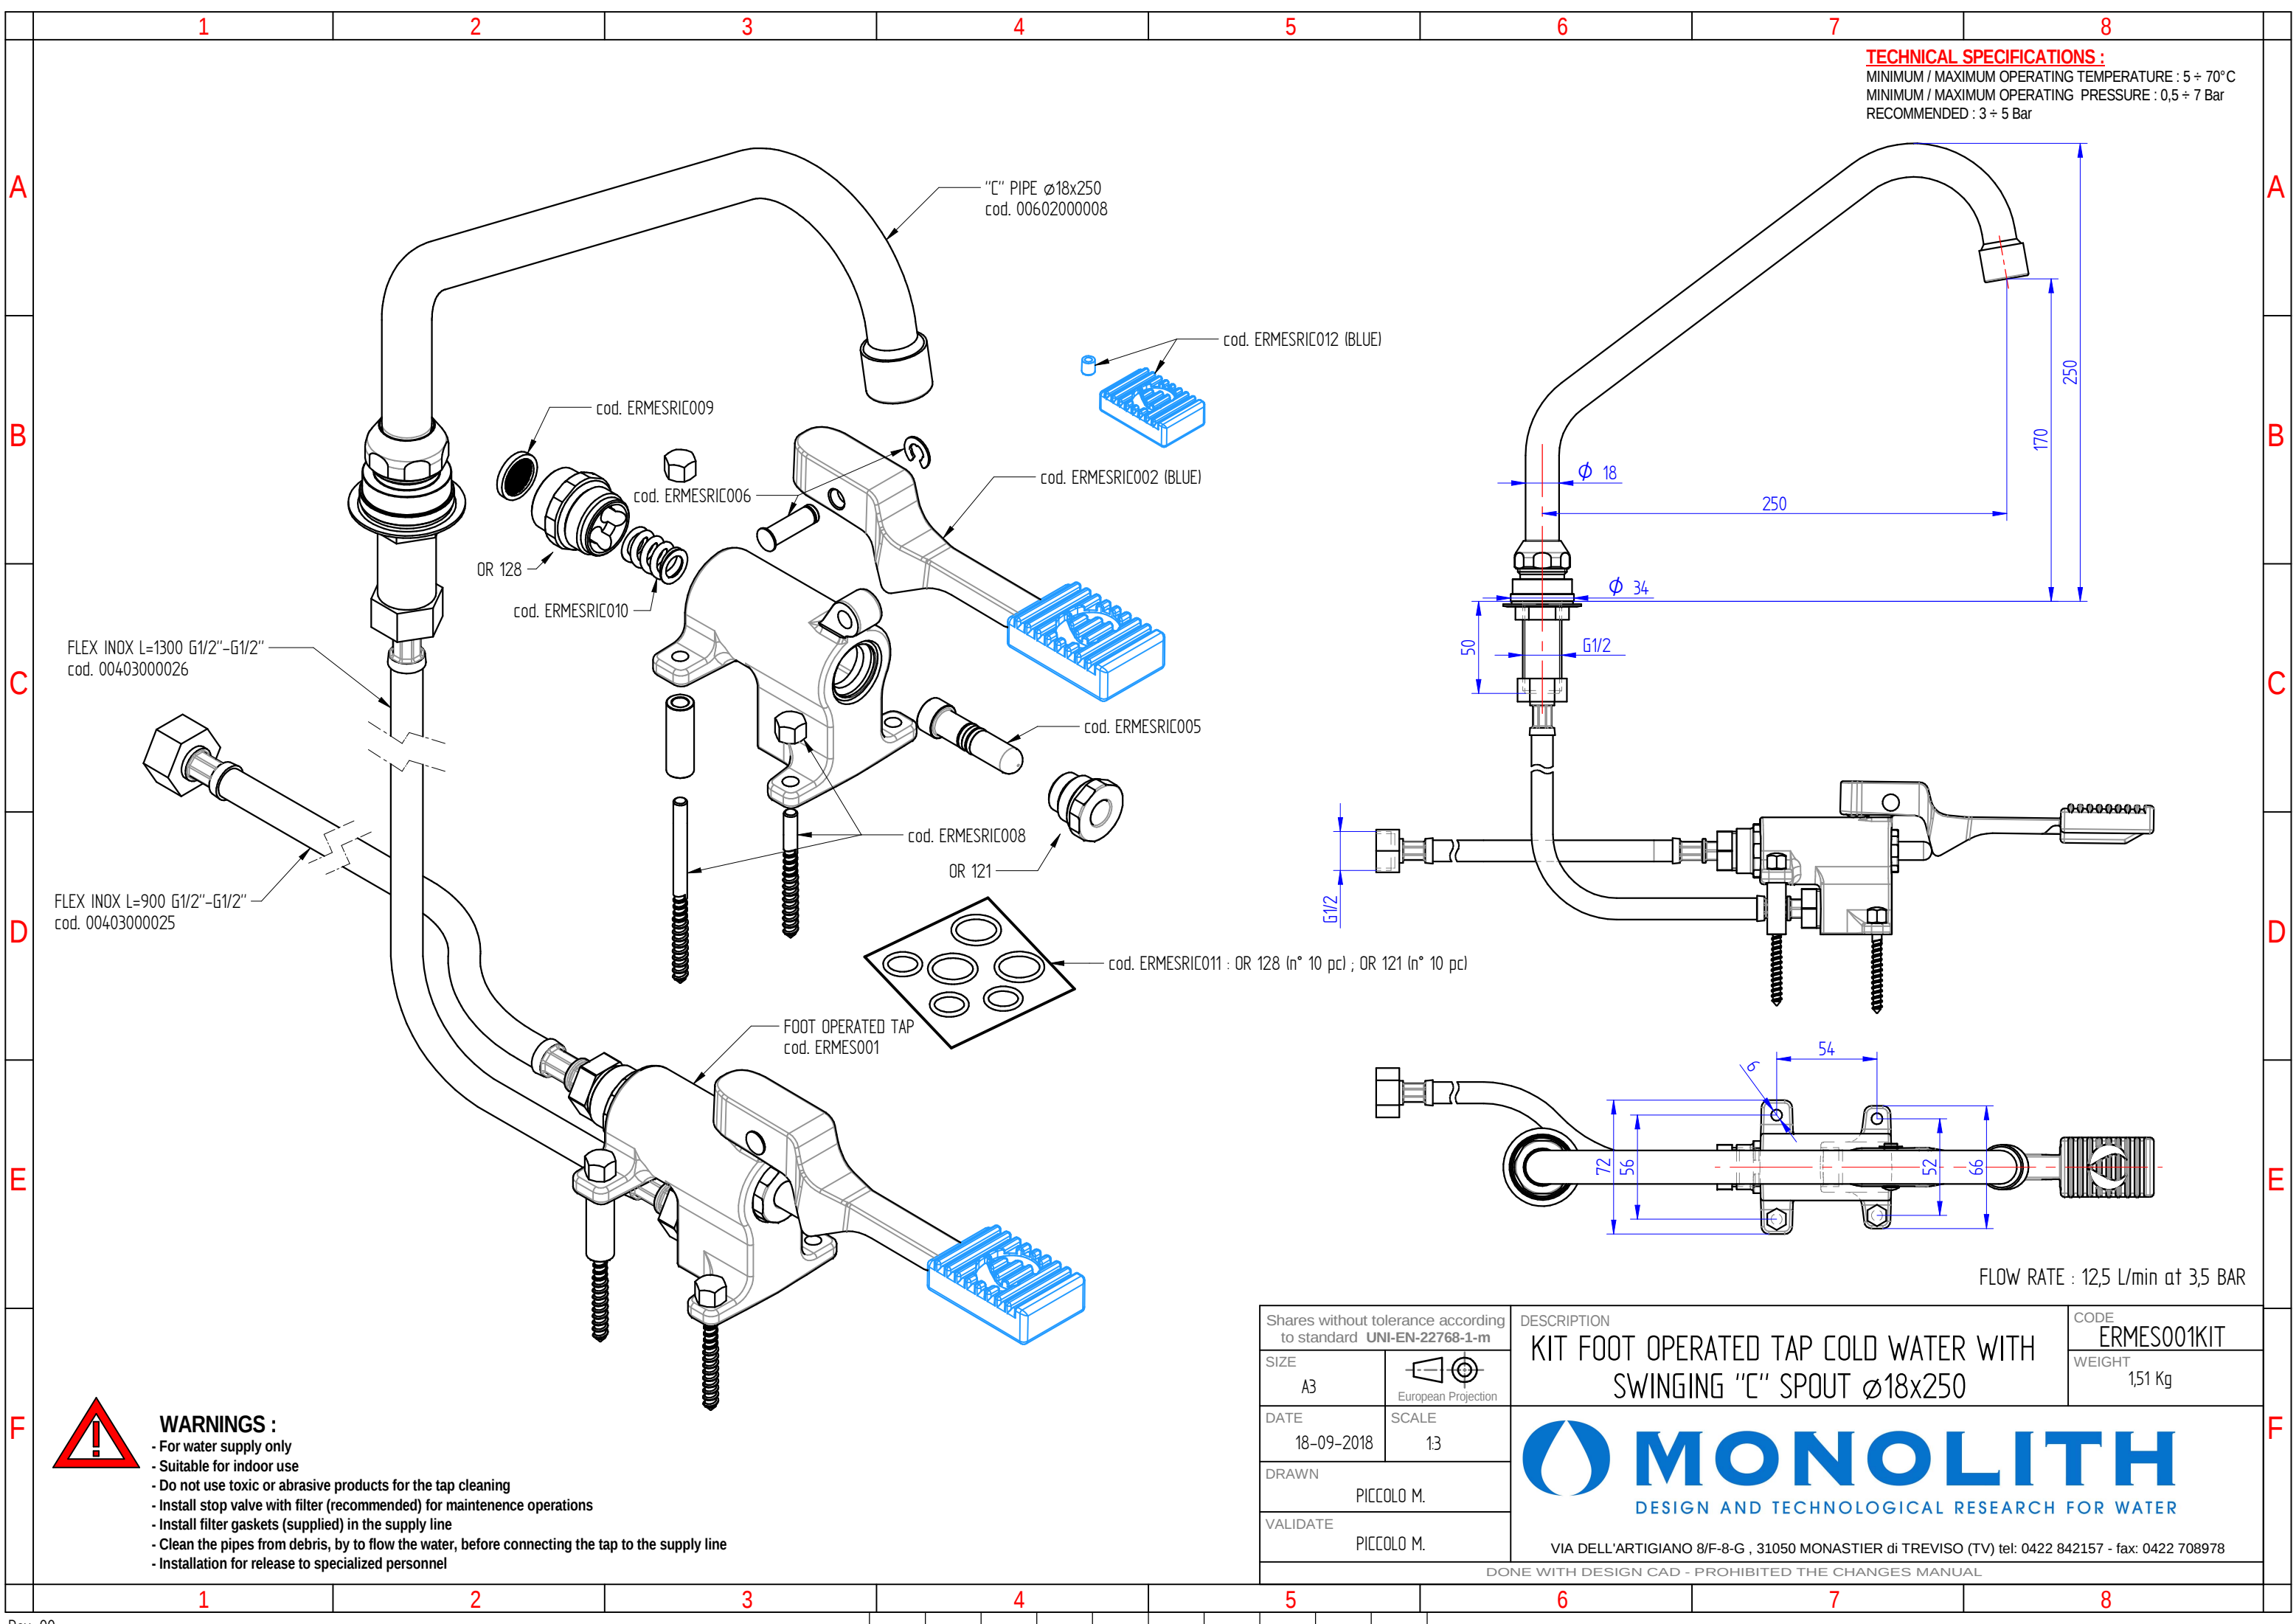




TECHNICAL SPECIFICATIONS :
MINIMUM / MAXIMUM OPERATING TEMPERATURE : 5 ÷ 70°C
MINIMUM / MAXIMUM OPERATING PRESSURE : 0,5 ÷ 7 Bar
RECOMMENDED : 3 ÷ 5 Bar

- WARNINGS :**
- For water supply only
 - Suitable for indoor use
 - Do not use toxic or abrasive products for the tap cleaning
 - Install stop valve with filter (recommended) for maintenance operations
 - Install filter gaskets (supplied) in the supply line
 - Clean the pipes from debris, by to flow the water, before connecting the tap to the supply line
 - Installation for release to specialized personnel

Shares without tolerance according to standard UNI-EN-22768-1-m		DESCRIPTION KIT FOOT OPERATED TAP COLD WATER WITH SWINGING "C" SPOUT Ø18x250	CODE ERMES001KIT
SIZE A3	 European Projection		WEIGHT 1,51 Kg
DATE 18-09-2018	SCALE 1:3	 MONOLITH DESIGN AND TECHNOLOGICAL RESEARCH FOR WATER	
DRAWN PICCOLO M.			
VALIDATE PICCOLO M.			
		VIA DELL'ARTIGIANO 8/F-8-G , 31050 MONASTIER di TREVISO (TV) tel: 0422 842157 - fax: 0422 708978	
DONE WITH DESIGN CAD - PROHIBITED THE CHANGES MANUAL			