


**TECHNICAL SPECIFICATIONS :**

MINIMUM / MAXIMUM OPERATING TEMPERATURE : 5 ÷ 70°C

MINIMUM / MAXIMUM OPERATING PRESSURE : 0,5 ÷ 7 Bar

RECOMMENDED : 3 ÷ 5 Bar

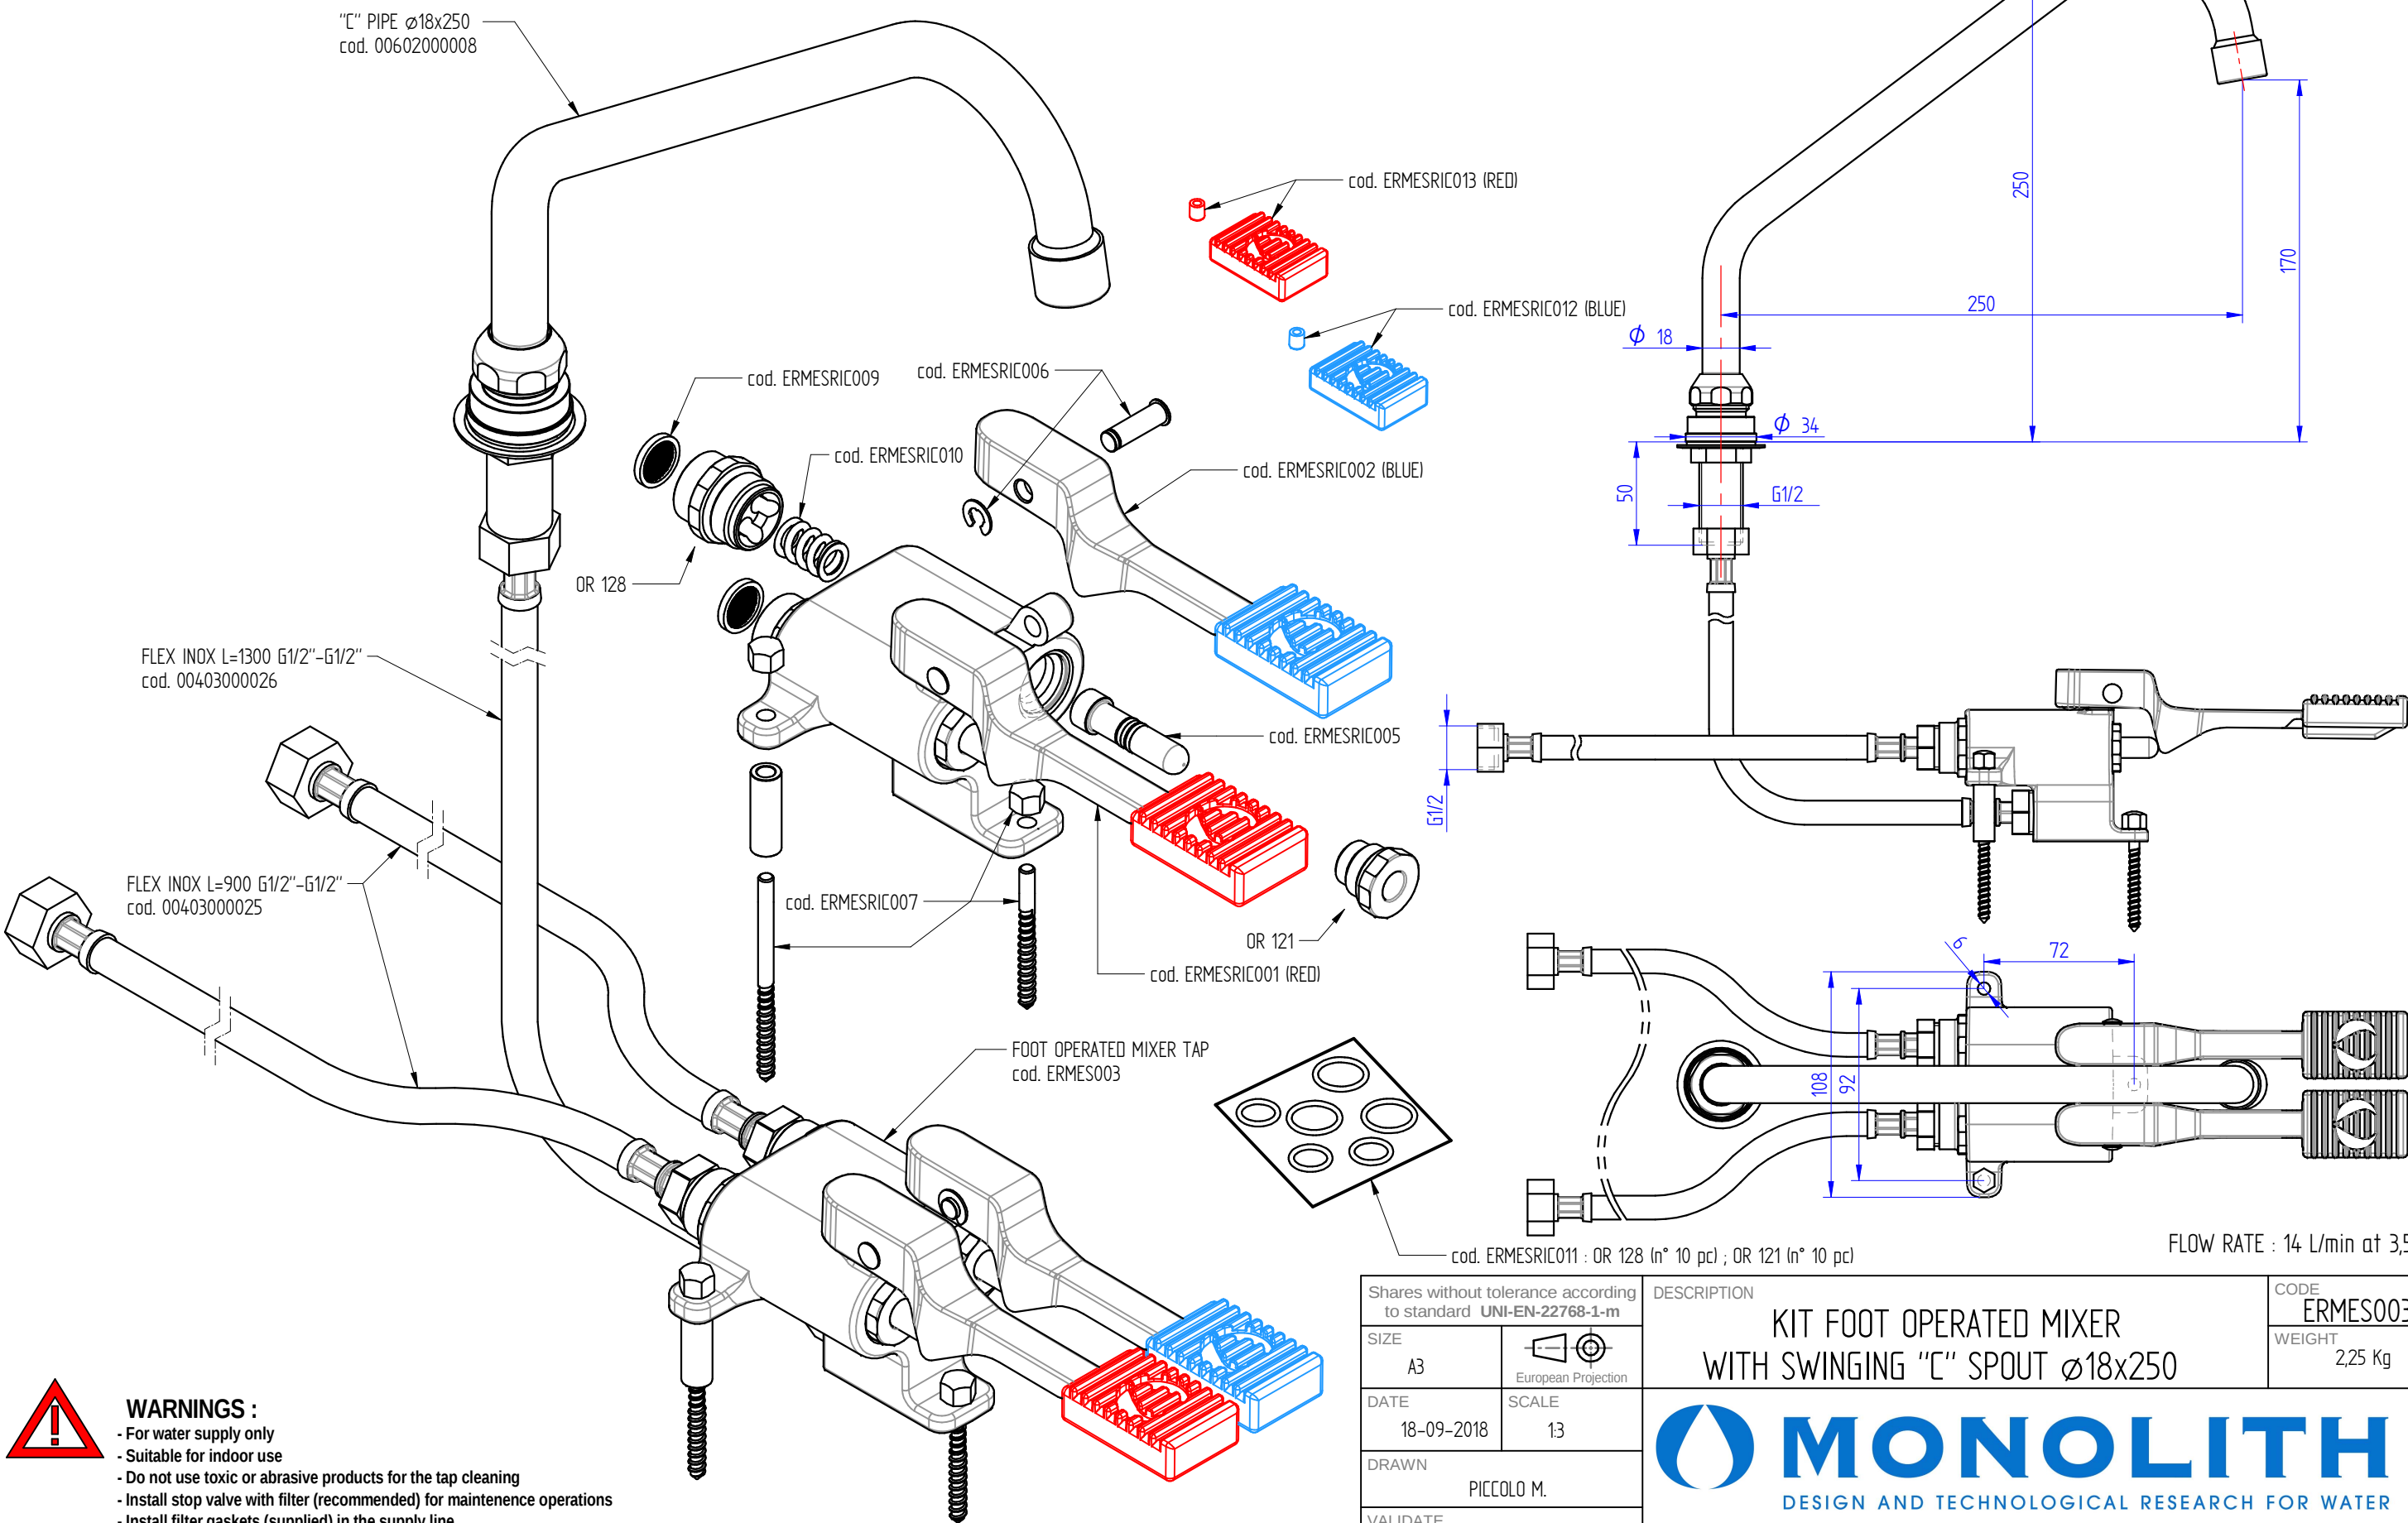

**WARNINGS :**

- For water supply only
- Suitable for indoor use
- Do not use toxic or abrasive products for the tap cleaning
- Install stop valve with filter (recommended) for maintenance operations
- Install filter gaskets (supplied) in the supply line
- Clean the pipes from debris, by to flow the water, before connecting the tap to the supply line
- Installation for release to specialized personnel

Shares without tolerance according to standard UNI-EN-22768-1-m

SIZE A3  
European Projection

DATE 18-09-2018  
SCALE 1:3

DRAWN PICCOLO M.

VALIDATE PICCOLO M.

DESCRIPTION

KIT FOOT OPERATED MIXER  
WITH SWINGING "C" SPOUT Ø18x250

**MONOLITH**  
DESIGN AND TECHNOLOGICAL RESEARCH FOR WATER

VIA DELL'ARTIGIANO 8/F-8-G, 31050 MONASTIER di TREVISO (TV) tel: 0422 842157 - fax: 0422 708978

DONE WITH DESIGN CAD - PROHIBITED THE CHANGES MANUAL

CODE

ERMES003KIT

WEIGHT

2,25 Kg

FLOW RATE : 14 L/min at 3,5 BAR